

THE GREATEST NAME

IN RUBBER

GOODYEAR

WINGFOOT RUBBER FLOORING AND WALL RUBBER





↑ Practically impervious to time, wear and dirt, Goodyear Wingfoot Rubber Flooring retains its brilliance and beauty through years of service. Illustration above shows Goodyear Wingfoot Rubber Flooring laid in sheet form.

↗ Beauty and economy meet in Goodyear Rubber Flooring, for among its outstanding virtues are low maintenance cost and almost unbelievable durability. Illustration at right shows a Goodyear Wingfoot Rubber Flooring laid in tile form.


THERE IS NO LIMIT TO THE POSSIBILITIES OF
GOODYEAR WINGFOOT
RUBBER FLOORING AND WALL RUBBER

It is suitable for public build-
ings, private homes, general
offices, banks, hospitals,
churches, schools and col-
leges, stores, clubs, hotels and
bars, ships, radio studios.

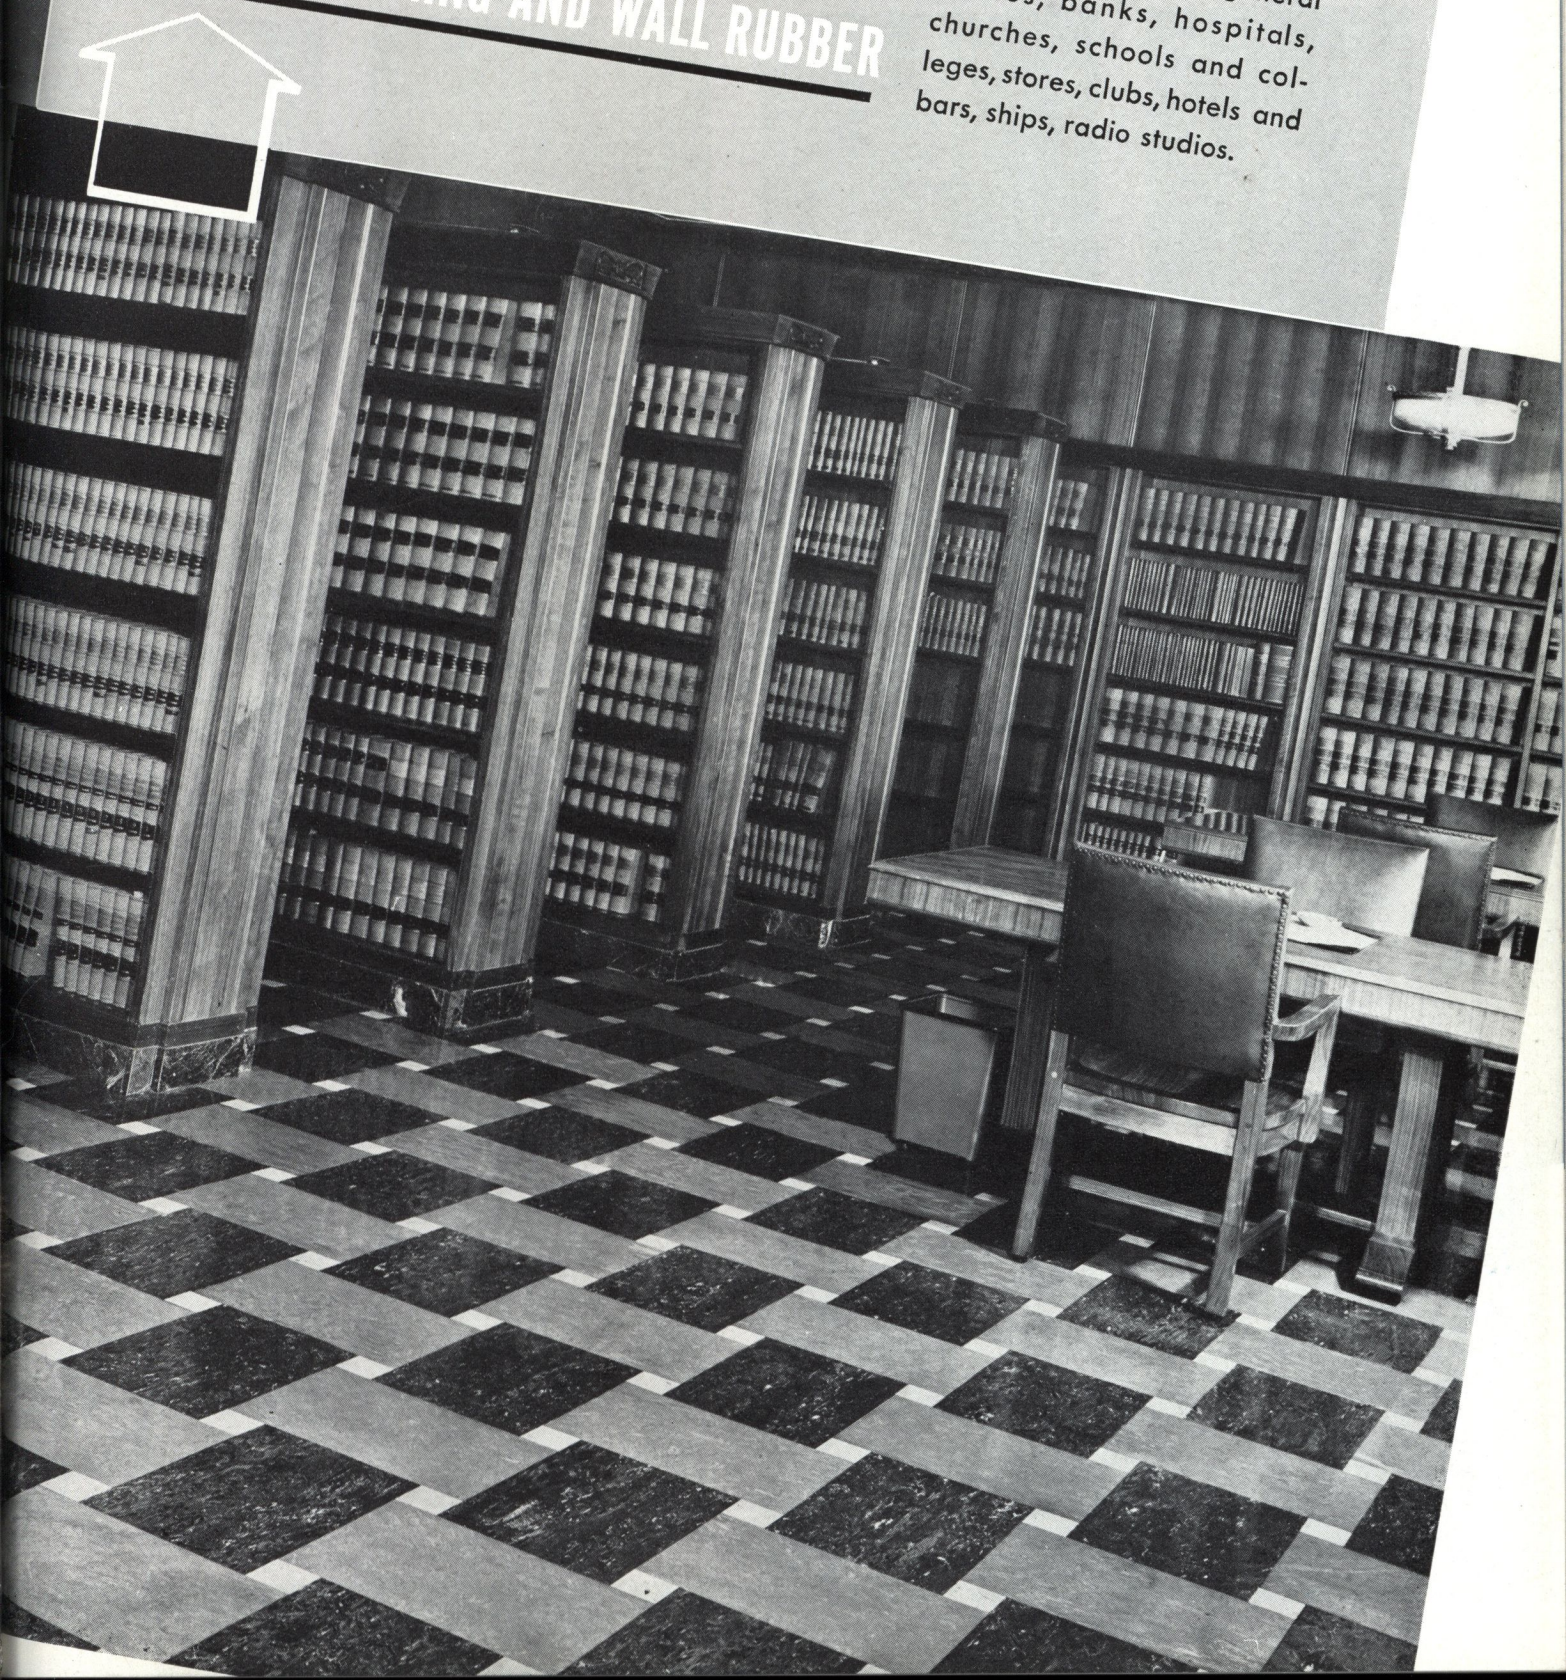



100 Plain
Dark Blue




108 Blue-White




201 Two-tone
Dark Blue Green




203 Light Blue
Green-Black



500 Three-tone
Gray




423 Black-Red-
Gold




422 Black-Green-White
(Verde Antique)




418 Two-tone Light
Gray-Green




503 Plain Light
French Gray




504 Light French
Gray-Black



603 Medium Jade
Green-Gray




611 Three-tone Light,
Medium, Dark Cream




815 Cream-Light
Brown-Dark Brown




810 Cream-Pink-
Brown




806 Cream-Gold-
Red-Black



800 Plain
Dark Cream




902 Plain White



903 White-Black

GOODYEAR Wingfoot Rubber Flooring, in sheet or tile form, is available in a wide range of plain and variegated colors with borders and feature strips which make possible the creation of an unlimited number of designs.


Note: These colors are available in Rubber Flooring




205 Two-tone Pastel
Blue Green



314 Dark Red-Black-
Gold



318 Light
Red-Gray




320 Bright
Red-Cream




402 Black-White



400 Plain Black




322 Maroon-Gold-
Black



321 Plain
Bright Red




613 Green-White




700 Two-tone
Dark Brown




701 Two-tone
Dark Brown-Cream



703 Medium Brown-
Yellow-Cream




719 Plain
Dark Brown




718 Yellow-Chocolate-
White




717 Three-tone
Light Brown



704 Plain Light
Brown




904 White-Blue




905 White-Black-
Green


BECAUSE it comes in continuous rolls and its cost is more moderate, thousands of feet of Goodyear Wingfoot Sheet Rubber Flooring are being installed in new and remodeled buildings with large floor areas.




109 W




205 W




208 W




323 W




614 W




408 W




400 W




324 W




615 W




700 W




720 W




721 W




906 W



817 W




816 W




800 W

GOODYEAR WINGFOOT WALL RUBBER



Used in harmonious treatment with Goodyear Wingfoot Rubber Flooring —Wingfoot Wall Rubber gives modern style, lasting beauty and permanent cleanliness to this modern bathroom. Figures on wall are hand cut.

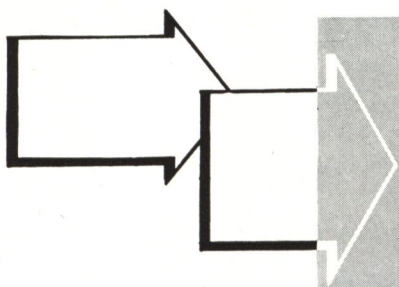

The same prized advantages of Goodyear Wingfoot Rubber Flooring are present in Goodyear Wingfoot Wall Rubber for walls, wainscotings and original mural decorations.



GOODYEAR WINGFOOT WALL RUBBER

GOODYEAR WINGFOOT RUBBER

SPECIFICATIONS

MANUFACTURER'S STANDARD GUARANTY ON RUBBER FLOORING AND WALL RUBBER

"We guarantee our product against defects provided our recommended maintenance instructions are followed and we will repair or replace any such defective product which is brought to our attention, in writing, within one year after date of completion of installation.

"We do not accept responsibility for any damages arising from defects or dampness in sub-floors or other surfaces which may occur after completion of installation."

Goodyear Wingfoot Flooring (Made in $\frac{1}{8}$ ", $\frac{3}{16}$ " and $\frac{1}{4}$ " Gauge)

Furnished in full rolls 25 to 35 yards long by 1 yard wide.

Goodyear Rubber Tile (Made in $\frac{1}{8}$ ", $\frac{3}{16}$ ", $\frac{1}{4}$ " and $\frac{3}{8}$ " Gauge)

Standard Sizes

(Furnished with square edges only)

4" x 4"	9" x 9"	6" x 12"
6" x 6"	12" x 12"	9" x 18"

Right and left diagonal halves of these sizes. Also any unit larger than 4 ins. in either width or length or both that can be cut without waste from 36" x 36" or 36" x 48" slabs.

Border Material and Strips

(Made in $\frac{1}{8}$ ", $\frac{3}{16}$ " and $\frac{1}{4}$ " Gauge)

Furnished in 1", $1\frac{1}{2}$ ", 3", 6", 9" and 12" widths.

Specifications for Sub-floors

"All concrete underfloors to receive rubber floor, shall be finished true and even and free from high and low spots, $\frac{1}{8}$ ", $\frac{3}{16}$ ", $\frac{1}{4}$ " or $\frac{3}{8}$ " in. below the required finished floor level — depending on the thickness of the rubber flooring.

"Concrete shall be thoroughly dry and clean, and free from cracks and surface defects.

"Goodyear rubber floor shall be installed direct to concrete underfloors."

(Note: No Goodyear rubber floor should be installed on concrete floors below grade or at grade—unless there is a sufficiently ventilated air space below the concrete slab to prevent the condensation of moisture on the under surface of the concrete.)

GOODYEAR WINGFOOT WALL RUBBER

(Made in $\frac{1}{16}$ " Gauge)

Furnished in full rolls 25 to 35 yards long by 1 yard wide, and in strips 1", $1\frac{1}{2}$ ", 3", 6", 9" and 12" wide.

Specification for Side-Walls.

NEW WALLS

Walls to receive GOODYEAR WINGFOOT WALL RUBBER should be a good quality plaster with a well bonded white coat finish. When dry the plaster should be smooth and firm. Any rough spots or trowel marks should be removed with sandpaper.

OLD WALLS

Any loose paint, wall paper or cold water paint, should be removed from old walls. Old walls should be free

from grease and dirt, or other substances that might prevent a perfect bond.

Any loose plaster should be removed and replaced. Holes and cracks should be filled. Any high spots on the old plaster walls should be removed by sanding.

WALL BOARDS

Hard-pressed construction wall boards with a smooth outer surface or plywood, when properly erected, provide a satisfactory backing for WINGFOOT WALL RUBBER.

Specifications for the Installation of Wingfoot Wall Rubber

All wall rubber to be furnished and installed under these specifications

"Good quality 30-pound bituminous asphalt saturated all-rag felt shall be cemented to wood underfloors with good quality paste, before installation of rubber floors.

"All materials included in this specification shall be approved by THE GOODYEAR TIRE & RUBBER COMPANY, INC."

Specifications for the Installation of GOODYEAR WINGFOOT RUBBER FLOORS and

GOODYEAR RUBBER TILE FLOORS

"All rubber floors to be furnished and installed under these specifications shall be manufactured by THE GOODYEAR TIRE & RUBBER COMPANY, INC.

"All coloring matter shall be of the highest quality. All pigments used shall be insoluble in water. All rubber flooring to be furnished shall be compounded and cured to a sufficient density to preclude the possibility of the floor creeping under traffic.

"As an extra precaution against the floor creeping or stretching under severe traffic a woven cotton fabric shall be properly vulcanized in the rubber flooring approximately $\frac{3}{64}$ in. from the bottom surface.

"All rubber floors to be furnished to a tolerance in thickness not over .005 of an inch, plus or minus. The exposed surface of the rubber floor shall have a smooth plate finish.

"Rubber floors to be installed in a neat, workmanlike manner by mechanics experienced in the laying of rubber flooring.

"Rubber floors to be installed in an adhesive of finest quality, approved by the rubber flooring manufacturer.

"After floors have been installed and before the adhesive has thoroughly set, the surface of the rubber shall be rolled both ways with special rollers, and all excess cement on surface of rubber floors or along joints shall be removed and the surface thoroughly cleaned.

"At points where rubber floors terminate against other types of flooring, brass or bronze separating strips shall be used.

"All rubber flooring shall carry the standard guarantee as outlined by the Rubber Flooring Division of the Rubber Manufacturers Association, Inc.

"The rubber flooring contractor will submit to the architect a typical sample of the material he proposes using and the material shall conform in all respects to that specified herein."

shall be manufactured by The GOODYEAR TIRE & RUBBER COMPANY, INC.

All coloring matter shall be of the highest quality. All pigments used shall be insoluble in water.

Wall Rubber shall be approximately $\frac{1}{16}$ " in thickness and shall have a fabric backing.

Material shall be installed with an adhesive approved by the manufacturer.

All seams shall be double-cut. Where rounded corners are specified, seams shall be at least six inches away from any corner.

After application of the Wall Rubber, the material shall be thoroughly rolled, starting at the center of each strip and working toward the edges to eliminate all air pockets.

FLOORING AND WALL RUBBER

ACCESSORIES

★ GOODYEAR RUBBER FLOORING ACCESSORIES ★

COVE BASE

(Furnished in 32 in. lengths only)

Height Above Finished Floor	Wall Gauge	Toe Gauge
2"	3/16" 1/4" 3/8"	3/16" 1/4" 3/8"
3"	only 3/8"	3/16" 1/4" 3/8"
4"	3/16" 1/4" 3/8"	3/16" 1/4" 3/8"
5"	3/16" only	3/16" 1/4"
6"	3/16" 1/4" 3/8"	3/16" 1/4" 3/8"
6"	1/8" only	1/8" 3/16" 1/4"

INSIDE AND OUTSIDE CORNERS

Height Above Finished Floor	Wall Gauge	Toe Gauge
4"	3/16" 1/4" 3/8"	3/16" 1/4" 3/8"
4" Hospital	3/16" 1/4" 3/8"	3/16" 1/4" 3/8"
6"	3/16" 1/4" 3/8"	3/16" 1/4" 3/8"
6"	1/8" only	1/8" 3/16" 1/4"

FEATHER EDGE COVE

Overall Height	Wall Gauge
1 1/2"	1/8"

PLINTHS

(Maximum length 30 in.)

	Widths	Thickness
Plain Plinths	4 3/4", 5 1/4", 5 5/8", 5 1/2", 5 3/4", 6"	7/8"
Offset Plinths	(4 1/8")	

WAINSCOT CAPS

	Width	Gauge	Length
Plain	2 1/2"	1/4"	32"
*Slotted	3"	7/16"	32"

*Slotted for 3/16 in. wainscot.

THRESHOLD OR DOOR SADDLES

Total width 5 in.—For use with either 3/16 in., 1/4 in. or 3/8 in. floor.
Total rise above finished floor, 1/8 in.
Maximum length, 44 in.

EXTERNAL WAINSCOT CORNERS

3/16 in. gauge only—32 in. high.
Right angle with 1 1/2 in. width on each side.

LONG STAIR TREAD


1/4 in. gauge only—any length up to and including 7 ft.
—11 3/4 in. wide, 1 1/2 in. nosing.

RISER FOR LONG TREAD

1/4 in. gauge only—any length up to and including 7 ft.
—11 3/4 in. wide, 1 1/2 in. nosing.

TABLE TOP BEADING

32 in. long, 1 1/2 in. wide—Round Beading.
3/4 in. thick.

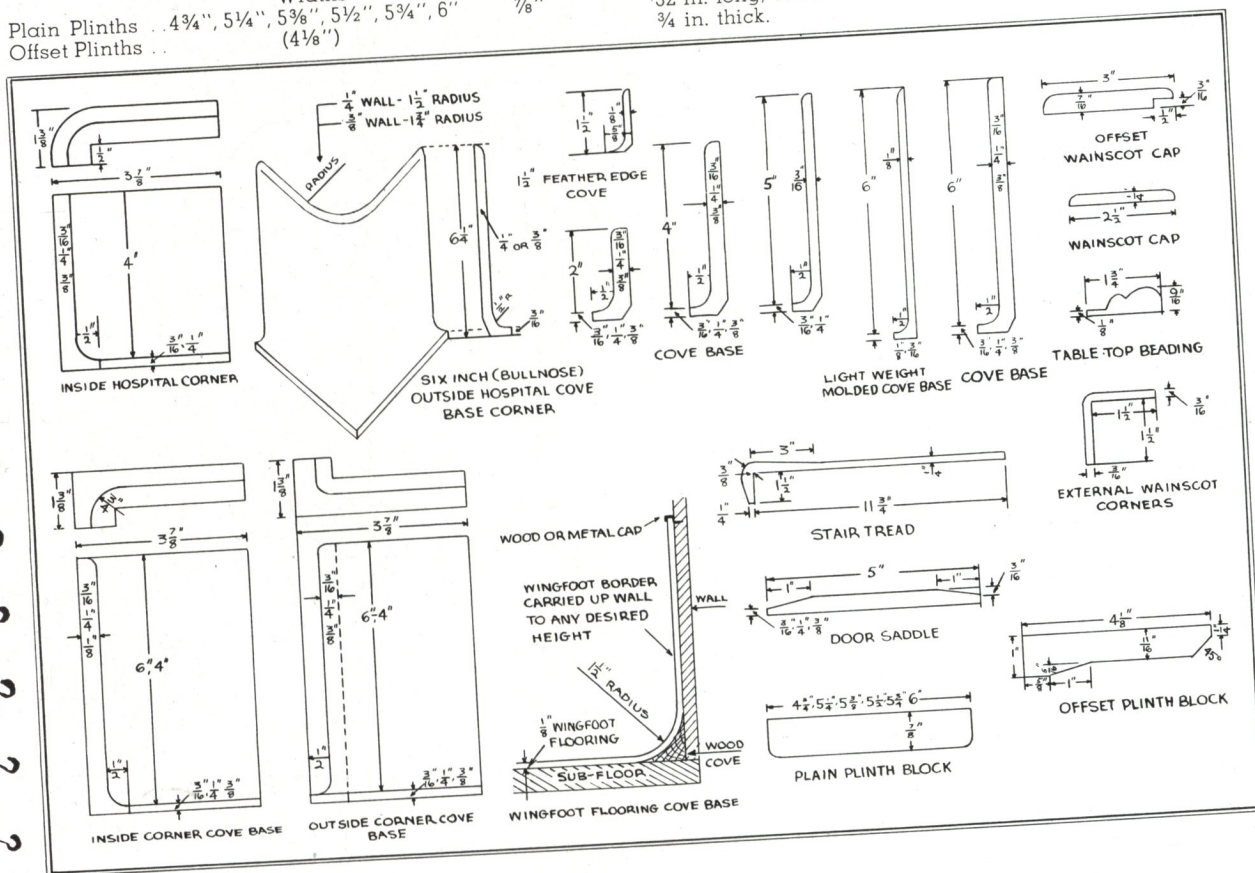

Digitized by:



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:
Robert Vail Cole Jr, AIA
1962 - 2011

GOOD YEAR WINGFOOT RUBBER FLOORING AND WALL RUBBER



For floors and walls of long endurance and lasting beauty — in private homes, public and commercial buildings.

THE GOODYEAR TIRE & RUBBER COMPANY, Inc.

AKRON, OHIO AND
LOS ANGELES, CALIFORNIA